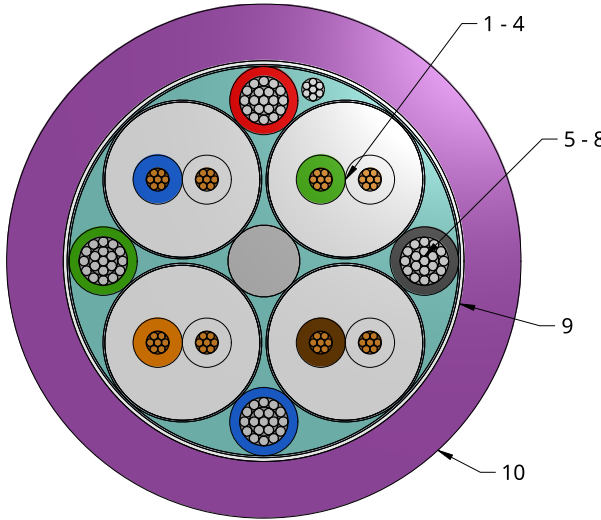


	1	2	3	4	5	6	7	8	9																																																																							
A	Part No: MEDUSA10 Customer Ref:			<table><thead><tr><th>No</th><th>Description</th><th>Colr</th><th>Dia mm</th></tr></thead><tbody><tr><td>1 2 3 4</td><td>4 Position Data Pairs 24 AWG (7/0.20mm) Plain Soft Copper HDPE Insulated to 1.30mm 2 off twisted together differential lays of 10mm, 12mm, 14mm & 16mm with Thermoplastic encapsulation to 3.60mm Overall helical 12/23µm Ali/PET foil screen, minimum overlap 50% - FOIL OUT</td><td>BU/WH OR/WH GN/WH BN/WH</td><td>3.70</td></tr><tr><td>5 6 7 8</td><td>4 Position 20AWG Conductors 20 AWG 0.60mm² (19/0.20mm) Tinned Copper FEP Insulated 0.20mm nom RTI</td><td>RD BK BU GN</td><td>1.40</td></tr><tr><td>9</td><td>Lay Up Items 1 - 4 cabled together around a central filler with Items 5 - 8 and a Tinned Copper drain wire in interstice All voids filled with vulcanised silicone compound Overall helical 12/23µm Ali/PET foil screen, minimum overlap 50% Overall helical non-woven polyester tissue tape, minimum overlap 30%</td><td>N/A</td><td>9.40</td></tr><tr><td>10</td><td>Jacket Polyether Polyurethane 75 Shore A Halogen Free 1.50mm nom RTI</td><td>VT</td><td>12.40 +/- 0.40</td></tr></tbody></table>			No	Description	Colr	Dia mm	1 2 3 4	4 Position Data Pairs 24 AWG (7/0.20mm) Plain Soft Copper HDPE Insulated to 1.30mm 2 off twisted together differential lays of 10mm, 12mm, 14mm & 16mm with Thermoplastic encapsulation to 3.60mm Overall helical 12/23µm Ali/PET foil screen, minimum overlap 50% - FOIL OUT	BU/WH OR/WH GN/WH BN/WH	3.70	5 6 7 8	4 Position 20AWG Conductors 20 AWG 0.60mm² (19/0.20mm) Tinned Copper FEP Insulated 0.20mm nom RTI	RD BK BU GN	1.40	9	Lay Up Items 1 - 4 cabled together around a central filler with Items 5 - 8 and a Tinned Copper drain wire in interstice All voids filled with vulcanised silicone compound Overall helical 12/23µm Ali/PET foil screen, minimum overlap 50% Overall helical non-woven polyester tissue tape, minimum overlap 30%	N/A	9.40	10	Jacket Polyether Polyurethane 75 Shore A Halogen Free 1.50mm nom RTI	VT	12.40 +/- 0.40	<table><thead><tr><th colspan="2">Note</th></tr></thead><tbody><tr><td>Electrical Characteristics</td><td></td></tr><tr><td>Data Pairs</td><td></td></tr><tr><td>Maximum Conductor Resistance</td><td>91.70 Ω/KM @ 20°C</td></tr><tr><td>Nominal Characteristic Impedance</td><td>100 Ω</td></tr><tr><td>Nominal Capacitance</td><td>68 pF/m</td></tr><tr><td>Calculated Inductance</td><td>0.60 mH/km</td></tr><tr><td>Data Rate</td><td>1.00 Gbps over 100m</td></tr><tr><td>20AWG Conductors</td><td></td></tr><tr><td>Maximum Conductor Resistance</td><td>33.80 Ω/KM @ 20°C</td></tr><tr><td>Voltage Rating Uo/U</td><td>300/500 Vrms</td></tr><tr><td>Test Voltage</td><td>2.50 KVac</td></tr><tr><td>Max Recommended Current</td><td>7 Amps</td></tr><tr><td>Mechanical Characteristics</td><td></td></tr><tr><td>Maximum Operating Temp</td><td></td></tr><tr><td>Static</td><td>+70°C</td></tr><tr><td>Dynamic</td><td>+60°C</td></tr><tr><td>Cold Flex Temp</td><td>-20°C</td></tr><tr><td>Min Recommended Bend Radius</td><td></td></tr><tr><td>Static</td><td>100 mm</td></tr><tr><td>Dynamic</td><td>185 mm</td></tr><tr><td>Depth Rating</td><td>6,000 M</td></tr><tr><td>Nominal Weight</td><td></td></tr><tr><td>In Air</td><td>191 KG/KM</td></tr><tr><td>In Sea Water @ SG 1.025</td><td>68 KG/KM</td></tr></tbody></table>			Note		Electrical Characteristics		Data Pairs		Maximum Conductor Resistance	91.70 Ω/KM @ 20°C	Nominal Characteristic Impedance	100 Ω	Nominal Capacitance	68 pF/m	Calculated Inductance	0.60 mH/km	Data Rate	1.00 Gbps over 100m	20AWG Conductors		Maximum Conductor Resistance	33.80 Ω/KM @ 20°C	Voltage Rating Uo/U	300/500 Vrms	Test Voltage	2.50 KVac	Max Recommended Current	7 Amps	Mechanical Characteristics		Maximum Operating Temp		Static	+70°C	Dynamic	+60°C	Cold Flex Temp	-20°C	Min Recommended Bend Radius		Static	100 mm	Dynamic	185 mm	Depth Rating	6,000 M	Nominal Weight		In Air	191 KG/KM	In Sea Water @ SG 1.025	68 KG/KM	A
No	Description	Colr	Dia mm																																																																													
1 2 3 4	4 Position Data Pairs 24 AWG (7/0.20mm) Plain Soft Copper HDPE Insulated to 1.30mm 2 off twisted together differential lays of 10mm, 12mm, 14mm & 16mm with Thermoplastic encapsulation to 3.60mm Overall helical 12/23µm Ali/PET foil screen, minimum overlap 50% - FOIL OUT	BU/WH OR/WH GN/WH BN/WH	3.70																																																																													
5 6 7 8	4 Position 20AWG Conductors 20 AWG 0.60mm² (19/0.20mm) Tinned Copper FEP Insulated 0.20mm nom RTI	RD BK BU GN	1.40																																																																													
9	Lay Up Items 1 - 4 cabled together around a central filler with Items 5 - 8 and a Tinned Copper drain wire in interstice All voids filled with vulcanised silicone compound Overall helical 12/23µm Ali/PET foil screen, minimum overlap 50% Overall helical non-woven polyester tissue tape, minimum overlap 30%	N/A	9.40																																																																													
10	Jacket Polyether Polyurethane 75 Shore A Halogen Free 1.50mm nom RTI	VT	12.40 +/- 0.40																																																																													
Note																																																																																
Electrical Characteristics																																																																																
Data Pairs																																																																																
Maximum Conductor Resistance	91.70 Ω/KM @ 20°C																																																																															
Nominal Characteristic Impedance	100 Ω																																																																															
Nominal Capacitance	68 pF/m																																																																															
Calculated Inductance	0.60 mH/km																																																																															
Data Rate	1.00 Gbps over 100m																																																																															
20AWG Conductors																																																																																
Maximum Conductor Resistance	33.80 Ω/KM @ 20°C																																																																															
Voltage Rating Uo/U	300/500 Vrms																																																																															
Test Voltage	2.50 KVac																																																																															
Max Recommended Current	7 Amps																																																																															
Mechanical Characteristics																																																																																
Maximum Operating Temp																																																																																
Static	+70°C																																																																															
Dynamic	+60°C																																																																															
Cold Flex Temp	-20°C																																																																															
Min Recommended Bend Radius																																																																																
Static	100 mm																																																																															
Dynamic	185 mm																																																																															
Depth Rating	6,000 M																																																																															
Nominal Weight																																																																																
In Air	191 KG/KM																																																																															
In Sea Water @ SG 1.025	68 KG/KM																																																																															
B				Print Details Text: Concept Cables Ltd ENGLAND www.conceptcables.com Medusa Deep Water Ethernet Repeat: 1,000mm Colour: Black			B																																																																									
C				Note Maximum Continuous Production Length: 1,000M			C																																																																									
D	CE UK UK CANI RoHS COMPLIANT 2011/65/EC LVD COMPLIANT 2014/35/EU Concept Cables Ltd ENGLAND www.conceptcables.com Medusa Deep Water Ethernet 						D																																																																									
										<table><thead><tr><th colspan="2">TITLE</th></tr></thead><tbody><tr><td>12C-20AWG-4JSTP-WB-PU-VT-12.40</td><td></td></tr><tr><th colspan="2">DESCRIPTION</th></tr><tr><td>Medusa 10 Deep Water Ethernet</td><td></td></tr><tr><th colspan="2">CUSTOMER</th></tr><tr><td></td><td></td></tr></tbody></table>	TITLE		12C-20AWG-4JSTP-WB-PU-VT-12.40		DESCRIPTION		Medusa 10 Deep Water Ethernet		CUSTOMER																																																													
TITLE																																																																																
12C-20AWG-4JSTP-WB-PU-VT-12.40																																																																																
DESCRIPTION																																																																																
Medusa 10 Deep Water Ethernet																																																																																
CUSTOMER																																																																																
	01	Quotation	TI	21/04/26	AJK	21/04/26	PR	21/04/26	This document is the property of Concept Cables Ltd and must not be copied, modified, re-printed or otherwise disclosed to any third party without written permission																																																																							
	ISSUE	DESCRIPTION	DRWN	DATE	CKD	DATE	APPD	DATE	FROM CONCEPT TO CABLE																																																																							